


Tube 120 BS 7

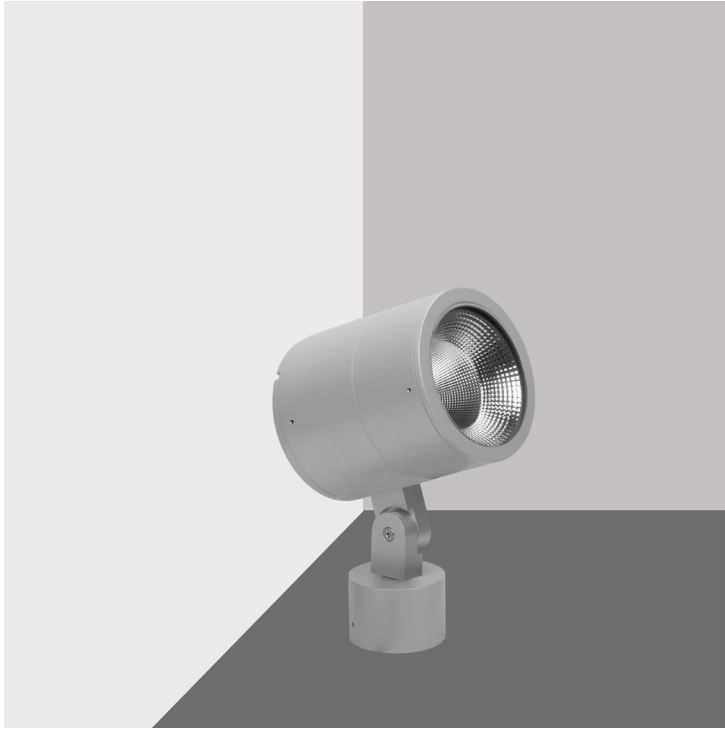

- Προβολέας led στεγανός
 - αλουμινίου βαρέως τύπου
 - ηλεκτροστατικά βαμμένος με πολυεστερική πούδρα
 - για αντοχή σε σκληρές εξωτερικές συνθήκες
 - με υάλινο προφυλακτήρα tempered
 - κινητός οριζοντίως και καθέτως
 - μέσω κλείδωσης αλουμινίου βαρέως τύπου
 - με ενσωματωμένο 1 COB LED ισχύος
 - τοποθετημένο σε ψήκτρα υψηλής απόδοσης
 - για την καλύτερη διαχείριση της θερμότητας του led
 - CRI>80+ | 3SDCM
 - κατόπιν παραγγελίας με CRI>90+
 - σε θερμοκρασία χρώματος 3000-4000 Kelvin
 - κατόπιν παραγγελίας και σε 2700-3500-5000-6500 Kelvin
 - με δέσμη 12°-18°-24°-40°-60°
 - με ενσωματωμένο led driver on/off
 - κατόπιν παραγγελίας dimmable phase cut/Dali / 1-10volt
 - με ελαστικά στεγανοποίησης
 - από σιλικόνη και βίδες inox
- Waterproof led projector
 - for outdoors use
 - from heavy duty die cast aluminum
 - polyester powder coated
 - for resistance under harsh environmental conditions
 - suitable for external use
 - with tempered glass transparent or mat
 - adjustable vertically and horizontally
 - with heavy duty aluminum joint
 - with incorporated 1 COB LED
 - adjusted on a high performance heatsink
 - for best thermal management of the led source
 - CRI>80+ | 3SDCM
 - upon request available with CRI>90+
 - in 3000-4000 Kelvin
 - upon request in 2700-3500-5000-6500 Kelvin
 - available with 12°-18°-24°-40°-60° angle beam
 - with incorporated led driver on/off as standard
 - upon request available dimmable phase cut/Dali/1-10volt
 - with silicon gaskets and inox screws

CRI>80 | Led source power and Luminous flux


Final lumen output depends on the selection of the angle beam

36566	7.0W	220-240V	3000-4000 KELVIN	740 - 760 LUMEN	ⓘ Ⓣ ⚠
36567	8.0W	220-240V	3000-4000 KELVIN	822 - 846 LUMEN	ⓘ Ⓣ ⚠
36568	10.0W	220-240V	3000-4000 KELVIN	1044-1075 LUMEN	ⓘ Ⓣ ⚠
36569	12.0W	220-240V	3000-4000 KELVIN	1212-1248 LUMEN	ⓘ Ⓣ ⚠
36570	14.0W	220-240V	3000-4000 KELVIN	1428-1470 LUMEN	ⓘ Ⓣ ⚠

∅ 120mm

↕ 145mm

CE IP65

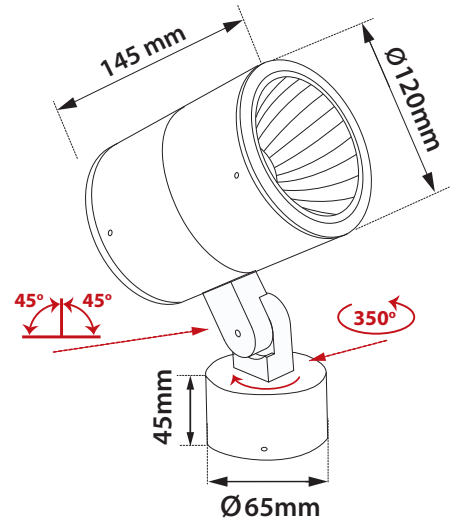

i Κατόπιν παραγγελίας διατίθεται με αντιθαμβωτικό σκιάδιο
Upon request available with anti-glare shield

Accessories upon request




Honey comb louvre



Smooth Filter



Elliptical Filter

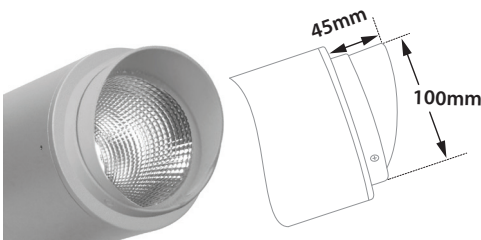

Καρφωτά στηρίγματα εδάφους διαθέσιμα κατόπιν παραγγελίας
Ground spikes available upon request

Καρφί αλουμινίου
Die cast aluminum spike
5075

